

## Cisco Model EPC3208 EuroDOCSIS 3.0 8x4 Cable Modem with Embedded Digital Voice Adapter

The Cisco® Model EPC3208 EuroDOCSIS 3.0 8x4 Cable Modem (EPC3208) is a high-speed cable modem with an embedded digital voice adapter. The EPC3208 provides a faster connection to the Internet by incorporating eight bonded downstream channels along with four bonded upstream channels. These bonded channels deliver downstream data rates in excess of 440 Mbps. That's up to eight times faster than conventional single-channel EuroDOCSIS™ 2.0 cable modems.

The EPC3208 uses advanced line-interface technology to provide multi-country, toll-quality telephone service using existing in-home wiring. The EPC3208 features single-line or two RJ-11 telephone ports for voice, and supports a total of 10 REN loading, 5 REN per phone line.

**Figure 1.** EPC3208 EuroDOCSIS 3.0 8x4 Cable Modem with Embedded Digital Voice Adapter (image may vary from actual product and specification)



The EPC3208 is designed to meet EuroPacketCable™ 1.5 and EuroDOCSIS 3.0 specifications as well as being backward compatible with EuroDOCSIS 2.0, 1.1, and 1.0 networks. The EPC3208 fully supports the CODECs specified in PacketCable 1.5. Additional CODECs are available through a software upgrade that includes a high-fidelity CODEC option for toll-quality plus service. Standard VoIP call signaling is compliant with PacketCable (MGCP/NCS) specifications. Software upgrades are available to support Session Initiation Protocol (SIP) call signaling.

## Features

### EuroDOCSIS

- Eight (8) bonded downstream channels with data rates in excess of 440 Mbps
- Four (4) bonded upstream channels with data rates in excess of 120 Mbps
- Designed to meet EuroDOCSIS 3.0 specifications as well as backward compatibility with existing EuroDOCSIS 2.0, 1.1 and 1.0 networks
- EuroDOCSIS compliant support for IPv6/IPv4
- Expanded tuning range, 108-1002 MHz

### Embedded Digital Voice Adapter

- Two-line embedded digital voice adapter for wired telephony service
- Toll-quality, high-compression, and high-fidelity (exceeding toll quality) CODEC options

### Connections

- 10/100/1000 Mbps Ethernet port with Auto-negotiate and Auto-MDIX
- Support for up to 64 users

### Design and Function

- Attractive compact design and versatile orientation to stand vertically, lie flat on the desktop or shelf, or mount easily on a wall
- Dual-color LED status indicators on the front panel indicate cable modem operational status
- Easy-to-understand generic icons communicate the purpose of each LED
- TR-068 compliant color-coded connectors and cables simplify installation and setup
- Rugged electronic components for long-term reliability

### Management

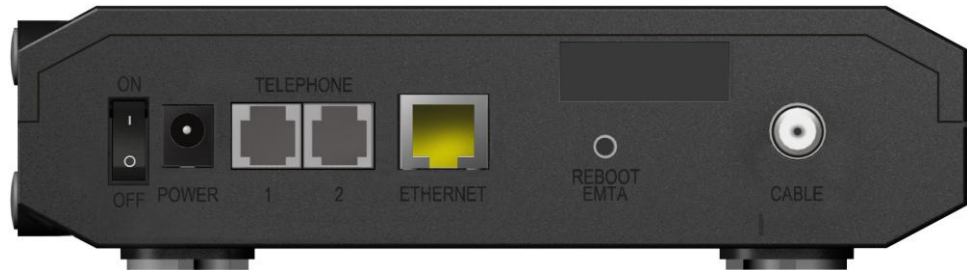
- Software upgradeable by network download
- Remote manageability using SNMP V1/V2 and V3

### Software and Documentation

- CD-ROM containing user guides

**Figure 2.** EPC3208 Front Panel (image may vary from actual product and specification)**Table 1.** Front Panel Features

Feature	Description
Indicators	POWER, DS, US, ONLINE, LINK, TEL1, TEL2, and corresponding icons
Color	Black case, black face plate, silver text, green/amber LEDs
Branding	Cisco logo and model number

**Figure 3.** EPC3208 Back Panel (image may vary from actual product and specification)**Table 2.** Back Panel Switch and Connections

Feature	Description
Power Switch	Turns power on and off to the device (power switch provided only on products carrying the CE mark)
POWER Connector Color: Black	Connects modem to the DC output of the AC power adapter
TELEPHONE 1 and 2 Color: Gray	RJ-11 telephone ports connect to home telephone wiring and to conventional telephones or fax machines
ETHERNET Connector Color: Yellow	RJ-45 Ethernet port connects to the Ethernet port on your PC or your home network
REBOOT EMTA	Power cycles the modem
CABLE Connector Color: White	F-connector connects to an active cable signal from your service provider

## Product Specifications

**Table 3.** Product Specifications

Specification	Value
<b>Voice Specifications</b>	
Call Signaling Protocol	<ul style="list-style-type: none"> <li>• MGCP/NCS including configurable IPsec encryption</li> <li>• Configurable to support RFC2833 event signaling</li> <li>• Supports Bell103 protocol</li> <li>• Software upgradeable to support Session Initiation Protocol (SIP)</li> <li>• The following SIP standards are supported: <ul style="list-style-type: none"> <li>◦ RFC 2617 HTTP Authentication: Basic and Digest Access Authentication</li> <li>◦ RFC 2976 The SIP INFO Method</li> <li>◦ RFC 3261 SIP: Session Initiation Protocol</li> <li>◦ RFC 3262 Reliability of Provisional Responses in Session Initiation Protocol (SIP)</li> <li>◦ RFC 3263 Session Initiation Protocol (SIP): Locating SIP Servers</li> <li>◦ RFC 3264 An Offer/Answer Model with Session Description Protocol (SDP)</li> <li>◦ RFC 3265 Session Initiation Protocol (SIP)-Specific Event Notification</li> <li>◦ RFC 3420 Internet Media Type message/sipfrag</li> <li>◦ RFC 3428 Session Initiation Protocol (SIP) Extension for Instant Messaging</li> <li>◦ RFC 3515 The Session Initiation Protocol (SIP) Refer Method</li> <li>◦ RFC 3842 A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)</li> <li>◦ RFC 3892 The Session Initiation Protocol (SIP) Referred-By Mechanism</li> <li>◦ RFC 3903 Session Initiation Protocol (SIP) Extension for Event State Publication</li> <li>◦ Draft-ietf-mmusic-sdp-new-24 SDP: Session Description Protocol (Replacement for RFC 2327)</li> <li>◦ Draft-ietf-sipping-cc-transfer-01 Session Initiation Protocol Call Control – Transfer</li> <li>◦ Draft-ietf-sip-session-timer-08 The SIP Session Timer</li> <li>◦ Draft-ietf-sipping-realtimefax-01 SIP Support for Real-time Fax: Call Flow Examples and Best Current Practices</li> <li>◦ Draft-ietf-mmusic-sdescription-09 Session Description Protocol Security</li> <li>◦ Descriptions for Media Streams</li> <li>◦ Draft-ietf-sip-replaces-02 The Session Initiation Protocol (SIP) "Replaces" Header Provisioning Modes</li> </ul> </li> </ul>
Provisioning Modes	<ul style="list-style-type: none"> <li>• Full EuroPacketCable secure provisioning</li> <li>• Kerberos support with NVRAM ticket caching</li> <li>• Configurable EuroPacketCable-lite (MTA config file provisioning without security)</li> <li>• Configurable for non-EuroPacketCable (MTA configuration using EuroDOCSIS config file) CODECs</li> </ul>
CODECs	<p>Standard: G.711, T.38 Fax Relay, iLBC and BV16</p> <p>Software upgradeable to support other CODEC combinations, including:</p> <ul style="list-style-type: none"> <li>• G.711 and G.728</li> <li>• G.711 and G.729</li> <li>• G.711 and G.729 a/e</li> <li>• G.711 and BV16 and BV32 (High fidelity – near CD quality)</li> <li>• G.711 and G.723</li> <li>• G.711 and G.726</li> </ul> <p><b>Note:</b> Other codec combinations can be downloaded as required.</p>
CODEC Packetization Intervals	10, 20, and 30 ms
CODEC Synchronization	CODEC synchronization to UGS time clock allows slip-free end-to-end sync to PSTN clock (minimizes frame slips that can cause Fax/Analog Modem call failures)
CODEC Encryption	Configurable to support AES-128 encryption or no encryption modes
Hearing Impaired Services Support	TDD support including detection of V.18 including Annex A
Fax and Analog Modem Support	DSP based Modem/Fax Tone detection and support for Voice Band Data Mode with auto-CODEC negotiation and auto-control of echo canceller, jitter buffer, and Voice Activation Detection (VAD)
Jitter Buffer Support	Adaptive dynamically controlled

Specification	Value
Latency Control	Configurable min / max jitter buffer size
Audio Gain Levels	Independently configurable Tx and Rx audio gains
Silence Suppression	Configurable VAD with comfort noise generation
Packet Loss Concealment	ANSI T1.521-1999
Call Connection Quality Monitoring	RTCP, RFC1889, RFC1890, SNMP MIB for last call quality statistics
Dialing Modes	Dialing ModesDTMF and configurable pulse dial support
DTMF Relay	RFC2833 including fast (40mS) DTMF Relay for alarm system signaling compatibility
Layer 2 Quality of Service	<ul style="list-style-type: none"> <li>Full PacketCable secure DQOS with GateID including UGS and UGS/AD</li> <li>DQOS Lite support including UGS and UGS/AD</li> </ul>
Layer 3 Quality of Service	Configurable DiffServe/TOS support for Signaling, RTP, and RTCP flows
Payload Header Suppression (PHS)	<ul style="list-style-type: none"> <li>Supported for RTP and RTCP packet flows to reduce per-call network bandwidth</li> <li>Advanced support for Dynamic Payload Header Suppression using Propane Technology</li> </ul>
Management	SNMPv3, SNMPv2, and SNMPv1, Telnet /SSH with configurable user ID and password, internal log, and external Syslog support
Echo Cancellation	G.168 with extended echo tail support
Call Feature Support	<ul style="list-style-type: none"> <li>Caller ID</li> <li>Call Waiting with Caller ID</li> <li>Cancel Call Waiting</li> <li>Call Conferencing (3-way calls)</li> <li>Configurable hook flash support</li> <li>Distinctive Ringing (Configurable for up to 11 ring patterns per phone line)</li> <li>Ring Splash</li> <li>Stutter Dial Tone</li> <li>Off hook warning tone</li> <li>Open Switch Interval support to enhance answering machine compatibility</li> <li>Configurable star codes</li> <li>Euro/US hook-flash type</li> <li>Call transfer</li> <li>Message Waiting Indicator</li> <li>Warm Line</li> <li>Call Forwarding Unconditional</li> <li>Call Forwarding on Busy</li> <li>Call Forwarding No Answer</li> <li>Call return</li> <li>Redial Call</li> <li>Automatic redial</li> <li>Other call features available with compliant CMS or gateway</li> </ul>
Telephone Ring Loading	Full 5 REN support on each phone line (10 REN total)
Ring Signal	Configurable balanced ring with configurable DC offset
Max Phone Line Distance	Supports up to 1000 ft of 26 AWG (0.4mm) wire on each phone line. Supports operation with typical in-home telephone wiring
Country-Specific Telephone Parameters Supported	United States, Japan, United Kingdom, Germany, France, Belgium, Netherlands, Finland, Italy, Switzerland, Sweden, Denmark, Brazil, Australia, Poland, Czech Republic, Hungary, Romania, ETSI 101 909-18
<b>RF Downstream</b>	
Operating Frequency Range	108 to 1002 MHz
Tuner Frequency Range	108 to 1002 MHz
Tuner	(1) Frequency agile block tuner, 96 MHz bandpass each
Demodulation	8 demodulators, 64 QAM or 256 QAM
Maximum Data Rate	8 downstream channels, each 6 MHz channel: 42.88 Mbps for 256 QAM and 30.34 Mbps for 64 QAM
Bandwidth	8 MHz and/or 6 MHz with Dual Mode capability

Specification	Value					
Operating Level Range	43 to 73 dB $\mu$ V for 64 QAM 47 to 77 dB $\mu$ V for 256 QAM					
Input Impedance	75 ohms					
<b>RF Upstream</b>						
Operating Frequency Range	5 to 42 MHz, 5 to 65 MHz, or 5 to 85 MHz					
Transmitter Frequency Range	5 to 42 MHz, 5 to 65 MHz, or 5 to 85 MHz					
Upstream Transmission	4 upstream channels					
Modulation	QPSK, 8 QAM, 16 QAM, 32 QAM, 64 QAM at ATDMA mode QPSK, 8 QAM, 16 QAM, 32 QAM, 64 QAM, 128 QAM at SCDMA mode					
Maximum Data Rate per Channel	<u>Modulation</u>	<u>Channel Bandwidth (MHz)</u>	<u>Raw Data Rate (Mb/s)</u>			
	QPSK	1.6	2.56			
	16 QAM	1.6	5.12			
	QPSK	3.2	5.12			
	16 QAM	3.2	10.24			
	32 QAM	3.2	12.8			
	64 QAM	3.2	15.4			
	16 QAM	6.4	20.5			
	32 QAM	6.4	25.6			
	64 QAM	6.4	30.72			
Bandwidth	200 kHz to 6.4 MHz					
Maximum Operating Level ( $\pm 2$ dB)	<u>Modulation</u>	<u>1 Channel</u>	<u>2 Channels</u>	<u>3 or 4 Channels</u>		
		TDMA	QPSK	+121 dB $\mu$ V	+118 dB $\mu$ V	+115 dB $\mu$ V
		8 QAM	+118 dB $\mu$ V	+115 dB $\mu$ V	+112 dB $\mu$ V	
		16 QAM	+118 dB $\mu$ V	+115 dB $\mu$ V	+112 dB $\mu$ V	
		32 QAM	+117 dB $\mu$ V	+114 dB $\mu$ V	+111 dB $\mu$ V	
	64 QAM	+117 dB $\mu$ V	+114 dB $\mu$ V	+111 dB $\mu$ V		
	SCDMA	QPSK	+116 dB $\mu$ V	+113 dB $\mu$ V	+113 dB $\mu$ V	
		8 QAM	+116 dB $\mu$ V	+113 dB $\mu$ V	+113 dB $\mu$ V	
		16 QAM	+116 dB $\mu$ V	+113 dB $\mu$ V	+113 dB $\mu$ V	
		32 QAM	+116 dB $\mu$ V	+113 dB $\mu$ V	+113 dB $\mu$ V	
		64 QAM	+116 dB $\mu$ V	+113 dB $\mu$ V	+113 dB $\mu$ V	
	128 QAM	+116 dB $\mu$ V	+113 dB $\mu$ V	+113 dB $\mu$ V		
	<b>Electrical</b>					
	Input Voltage	15 VDC				
Power Consumption (Modem Module)	~ 5.8 Watts					
Data Ports	Ethernet 10/100/1000BASE-T (Auto-sensing with Auto-MDIX) RJ-45 Ethernet (1)					
RF	Female "F" type					
Impedance	75 ohms					
<b>Mechanical</b>						
Dimensions (W x D x H) (Approximate)	Not including "F" connector: 6.99 in. x 6.15 in. x 1.93 in. (17.75 cm x 15.623 cm x 4.9 cm)					
Weight (Approximate)	0.34 kg (11.99 oz)					
Operating Temperature	0° to 40°C (32° to 104°F)					
Operating Humidity	0 to 90% RH non-condensing					
Storage Temperature	-20° to 60°C (-4° to 140°F)					

Specification	Value
<b>Standards and Approvals</b>	
Designed to Comply with the Following Standards	EuroPacketCable 1.5, 1.0 EuroDOCSIS 3.0, 2.0, 1.1, 1.0
Regulatory and Safety Approvals	As required per country where the EPC3208 will be used

## Ordering Information

**Table 4.** Ordering Information

Description	Part Number
<b>5-65/88-1002 MHz Diplex Filter</b>	
EPC3208 EuroDOCSIS 3.0 Cable Modem with Embedded Digital Voice Adapter. Includes: <ul style="list-style-type: none"> <li>• 230 VAC / 50-60 Hz, 15 VDC wall-mount linear switching power supply, Europe</li> <li>• Ethernet cable</li> <li>• CD-ROM containing user guides</li> </ul> <i>Europe</i>	4038908

## Replacement Components

**Table 5.** Replacement Components

Description	Part Number
<b>Power Supply</b>	
<i>Class 2 Linear Switching</i>	
230 VAC / 50-60 Hz, 15 VDC / 1 A wall-mount linear switching power supply, Europe	4015455
230 VAC / 50-60 Hz, 15 VDC / 1.5 A wall-mount linear switching power supply, UK	4018795
<b>Data Cable</b>	
Ethernet, 1.2 meters	740580
<b>CD-ROM</b>	
CD-ROM with user guides	4040235



Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks).

EuroDOCSIS and EuroPacketCable are trademarks of Cable Television Laboratories, Inc.

Other third party trademarks mentioned are the property of their respective owners.

The use of the word partner does not imply a partnership relationship between Cisco and any other company.  
(1009R)

Specifications and product availability are subject to change without notice.

© 2011 Cisco and/or its affiliates. All rights reserved.

Cisco Systems, Inc.  
800 722-2009 or 678 277-1120  
[www.cisco.com](http://www.cisco.com)

Part Number 7017300 Rev A  
January 2011